


SPECIFICATION

| | | |
|-----------------|----------|---------------------------------|
| Quality | | : CLOUD |
| Construction | | : Scroll loop pile |
| Dye method | | : Solution dyed |
| Gauge | | : Tufted 1/10" |
| No. of tufts | ISO 1763 | : ± 236400/m ² |
| Pile fibre | | : 100% Nylon (PA 6) |
| Pile weight | ISO 8543 | : 650 gr/m ² ± 5% |
| Pile height | ISO 1766 | : 3.5 mm ± 5% |
| Primary backing | | : Non-Woven |
| Tile backing | | : Polyflex |
| Total thickness | ISO 1765 | : 5,7 mm ± 5% |
| Total weight | ISO 8543 | : 4100 gr/m ² ± 7,5% |
| Tile size | | : 50 x 50 cm (± 19.7" x 19.7") |
| Tiles per box | | : 20 |



PERFORMANCE

| | | |
|-----------------------|-------------------|---------------------------|
| Use classification | method en 1307 | : 33 |
| Castor chair test | EN 985 | : A, continuous use |
| Abrasion | ISO 12951 | : pass |
| Vettermann test | ISO 10361/EN 1471 | : pass |
| Thermal isolation | ISO 8302 | : 0.08 m ² K/W |
| Dimensional stability | EN 986 | : pass |
| Luxury/Comfort | EN 1307 | : classe 1 |
| Static loading | | : anti-static |

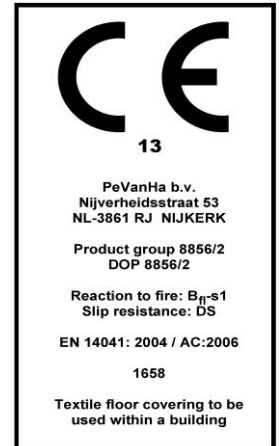

FLAME PROPERTIES

| | | |
|--------------------|--------------------------|-----------------------|
| Reaction to fire | EN ISO 11925-2 | : B _{fl} -s1 |
| Hot metal nut test | EN ISO 9239-1 BS 4790 | : Low-radius |



COLOUR FASTNESS PROPERTIES

| | | |
|--------------|-------------|---------|
| Light | ISO 105 B02 | : >5.00 |
| Rubbing, dry | ISO 105 X12 | : 5.00 |
| Rubbing, wet | ISO 105 X12 | : 5.00 |



GENERAL

Recommended maintenance:
Pile direction:

Best results are obtained when cleaned with a dry shampoo method.
Directional arrows are printed on the back of each tile.
Best results are obtained when laid checkerboard.

Laying instructions:

Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m² it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

COLOURS

| |
|------|
| 9677 |
| 9655 |
| 9675 |
| 9665 |
| 9676 |

| |
|------|
| 9678 |
| 9685 |
| 9675 |
| 9625 |
| 9672 |

| |
|------|
| 9673 |
| 9633 |
| 9675 |
| 9622 |
| 9671 |

